









NETWORK CABINET RACK 47U 60*80

NS-503GL47U6080

FEATURES

- Best sales and famous model floor rack.
- Reliable structure, static loading capacity: 800KGs (Optional castors and plinth).
- Adjustable feet and heavy duty castors are available simultaneously, moving conveniently and fixing reliably.
- Baying together easily, quickly, efficiently and firmly.
- Glass front door with metal panel and rear metal door
- Optional cable entry on top cover and bottom panel.
 Front, rear door and side panel can be removed facility,
 the bottom has the function of ventilation and rat-proof.
- Varies optional accessories, reliable quality.
- Optional opening hole and varies specification upon customers' special requirements.
- 8 heights: 18U,22U,24U,27U,32U,37U, 42U,47U
 (Can customize).

- 3 depth option: 800, 900 and 1000mm.
- Flexible packing methods allows for convenient stocking and end user delivery.
- Multiple sizes available.
- Customization requests welcome.

STANDARD AND MATERIAL

Comply with

- ANSI/EIA;RS-310-D;IEC297-2; DIN41491:PART1; DIN41494:PART7; GB/T3047.2-92
- Standard and ETSI standard.(grey).

SURFACE TREATMENT

 degreasing,pickling,phosphoric, powder coating.

MATERIAL

• SPCC cold rolled steel.

THICKNESS

 Mounting profile 2.0mm; the others:1.0-1.2mm.

COLOR

 Body color:RAL9004(black); RAL7035(grey).

DIFFERENT ANGELS








Mounting angle

Bottom panel

DOOR CATEGORY COLLECTION

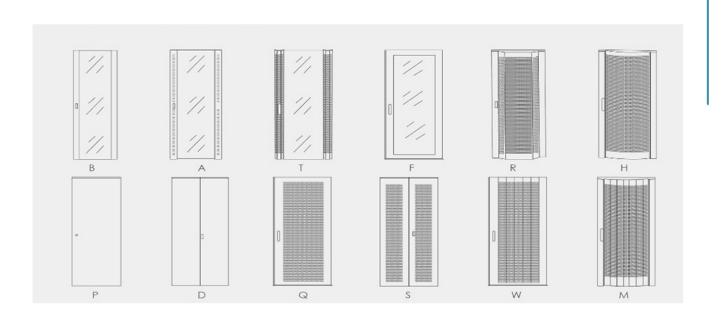


RACK LAYOUT


No.	Name	Qty	SPCCT (mm)
- 1	Frame	2 PCS	1.2
2	Mounting angle	4/6 PCS	1.2
3	Mounting Profile	4 PCS	2.0
4	Top cover	1 PCS	1.2
5	Bottom panel	1 PCS	1.2
6	Fan tray	1 PCS	1.0
7	Panel	3 PCS	1.0
8	Cable entrance panel	5 PCS	1.0
9	Fixed shelf	Quantity as request	1.2
10	Castor	4 PCS	/
- 11	Side panel	2 PCS	1.0
12	Tempered glass door	1 PCS	1.2
13	Front door toughened glass & plate door border	1 PCS (Quantity as request)	1.2


Name	Qty	SPCCT (mm)
High density vented door	1 PCS (Quantity as request)	1.2
Front door hexagonal reticular vented door	1 PCS (Quantity as request)	1.2
Vented rear door	1 PCS (Quantity as request)	1.2
Steel front door	1 PCS	1.2
Double-section vented door	1 PCS (Quantity as request)	1.2
Front door hexagonal reticular vented plate door	1 PCS (Quantity as request)	1.2
	High density vented door Front door hexagonal reticular vented door Vented rear door Steel front door Double-section vented door Front door hexagonal reticular	High density vented door Front door hexagonal reticular vented door Vented rear door Steel front door Double-section vented door Front door hexagonal reticular Double-section vented door Front door hexagonal reticular 1 PCS (Quantity as request) 1 PCS (Quantity as request) 1 PCS (Quantity as request)

Remark: The cabinet size above 37U using 6 pcs mounting angle, under 37U using 4 pcs

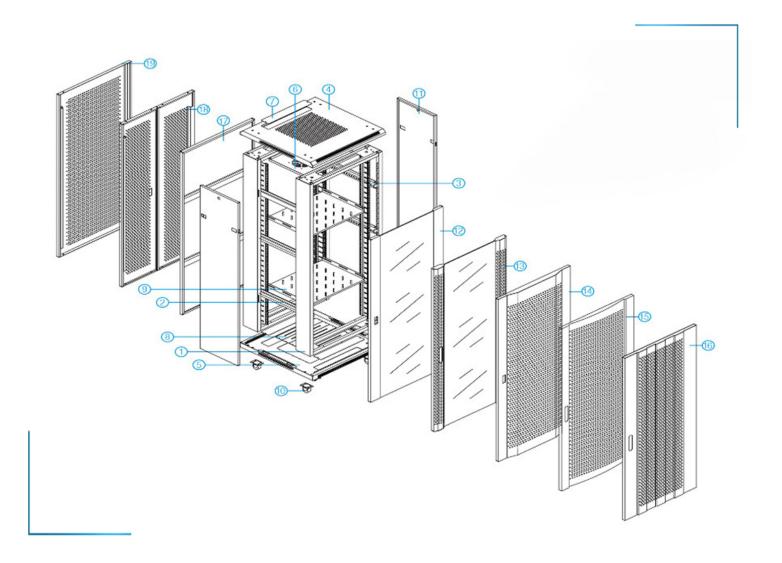


TECHNICAL SPECIFICATION

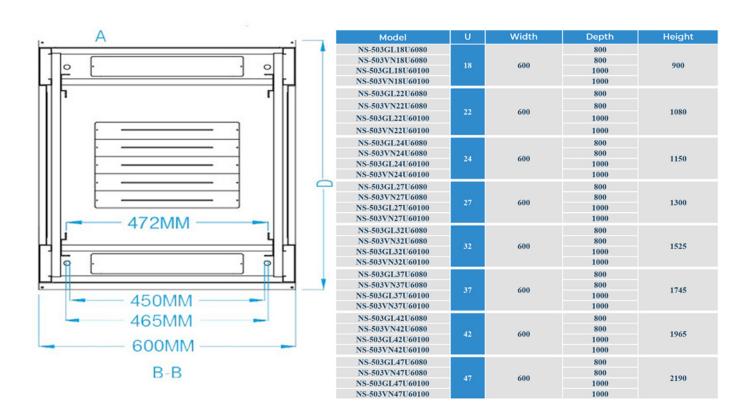

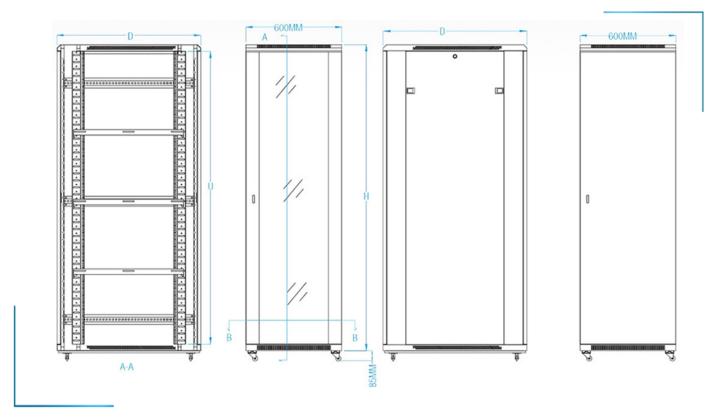

RACK INSTALLATION

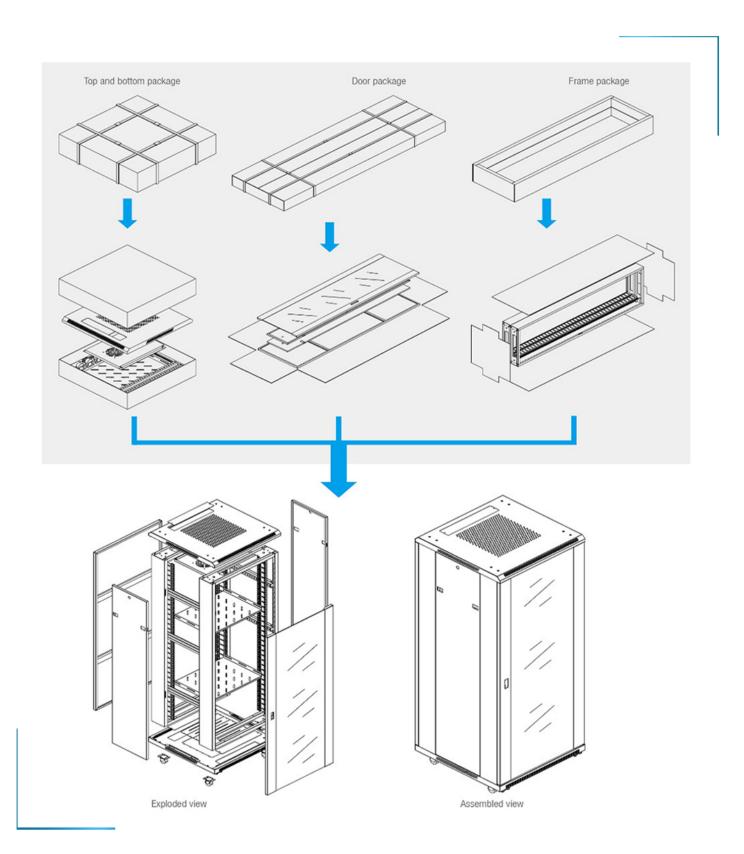

RACK IMAGES







REAR DOOR